








Remove and separate the welding seams made with laser technology.

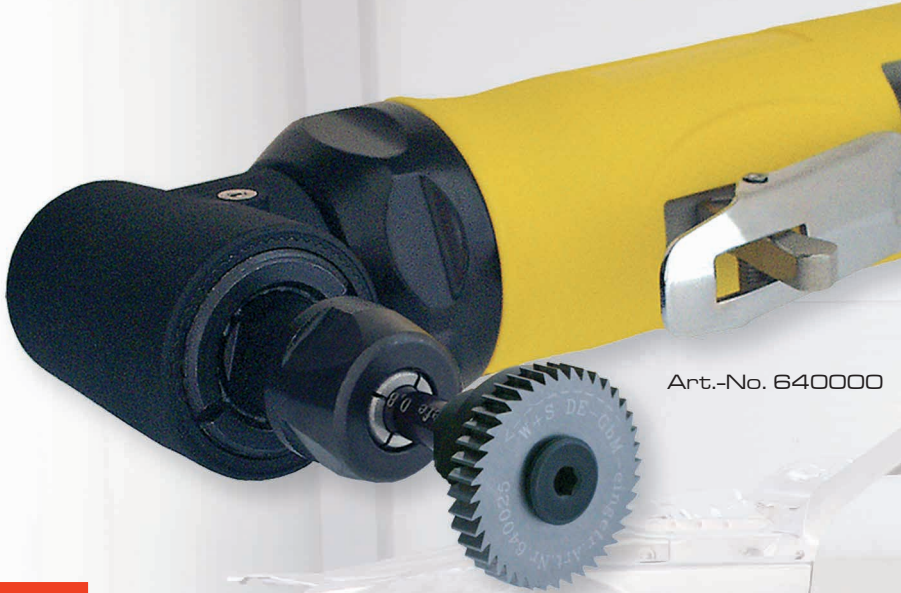

Art.-No. 640000

- The special cutting geometry created by the special Duplex grinding process guarantees a square cutting edge along the laser weld.
- High quality manufacturing and materials guarantee along durability
- The smooth running of the cutting wheel is achieved by the precision polishing of the shaft.
- Lightweight tool - only 850g - perfect for the user and ideal for the job
- Made in Germany

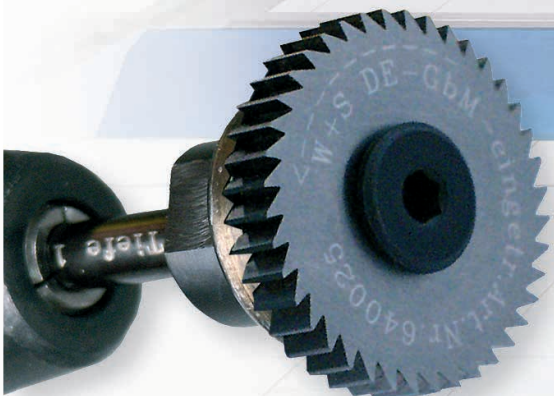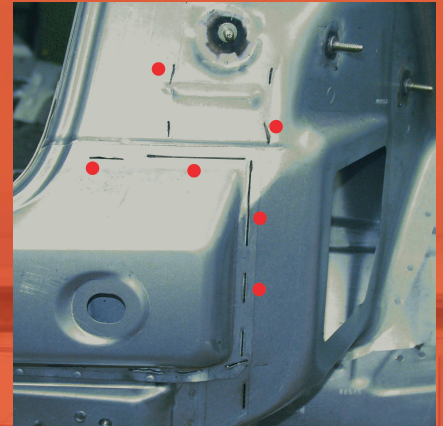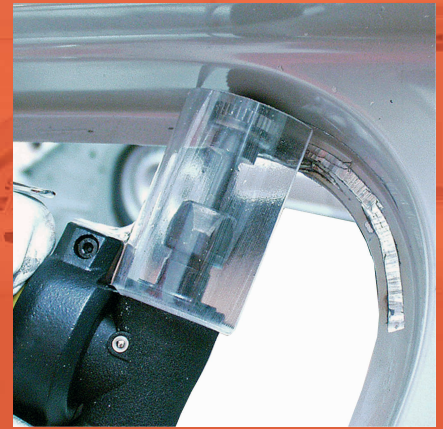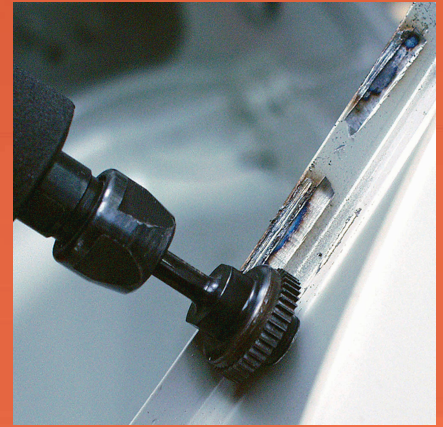

Newly developed and highly innovative Laser Cutter features: High speed cutting wheel made of a special hardened metal. Depth of cut limitation - optional at either 0,8 mm or 1,0 mm

OEM's Choice
 Top Level Consultation
 Local Premium Distributors Body Shop Training
 Wieländer+Schill
 Best Service
 Repair Centre



1. Cutting Wheel VHM Ø 40 x 4 mm
 Art.-No. 640030
 Cutting Wheel VHM Ø 25 x 4 mm
 Art.-No. 640025
2. Arbor, cutting depth 0,8 mm 25er
 Art.-No. 640005
 Arbor, cutting depth 1,0 mm 25er
 Art.-No. 640010
 Arbor, cutting depth 0,8 mm 40er
 Art.-No. 640015
 Arbor, cutting depth 1,0 mm 40er
 Art.-No. 640020
3. High quality cutting oil BTR-Fluid 125 ml
 Art.-No. 628000
4. Face and ear protector
 Art.-No. 881030
5. Grinding protection blanket
 2000 x 1250 mm
 Art.-No. 881002
6. Safety goggles
 Art.-No. 881035
7. Body chisel with handle
 Art.-No. 512001



Art.-No. 640000

Technical data:

Air pressure:	6-8 bar
Free speed:	18.000 U/min.
Air consumption:	500 l/min.
Connector thread:	1/4"
Vibration:	< 0.9 m/s ²
Noise:	82 dB
Weight:	850 g

Content of delivery:

- 1 x Pneumatic angle grinder LC 04
- 1 x Retainer arbor 0,8 mm/ 25er
- 1 x Retainer arbor 1,0 mm/ 25er
- 1 x Cutting wheel 25 x 4 mm
- 1 x Protection cover for cutting wheel 25er
- 1 x Clamp ring
- 1 x Guiding arm
- 1 x Assembly wrenches
- 1 x Allan key size 3
- 1 x High quality cutting oil 50 ml

